

Angle Seat Manual Valve

7011

SCHUBERT & SALZER
**CONTROL
SYSTEMS**


DN 15 up to DN 50, PN 40

Manually operated valve for neutral up to highly aggressive media.

- Compact design
- Working pressure up to 40 bar
- All parts contacting the fluid made from stainless steel
- Backsealing to unburden the stuffing box when the valve is opened

Technical Information

Orifice sizes	DN 15 up to DN 50 (1/2" - 2")	
Connections	BSP thread	Rp 1/2" - Rp 2"
	NPT thread	1/2" - 2"
	Without thread	
	Welding ends acc. ISO	
	Welding ends acc. DIN	
Body material	Stainless steel mat. no. 1.4408	
Nominal pressure	ANSI	
Fluid temperature	-30°C up to +200°C	

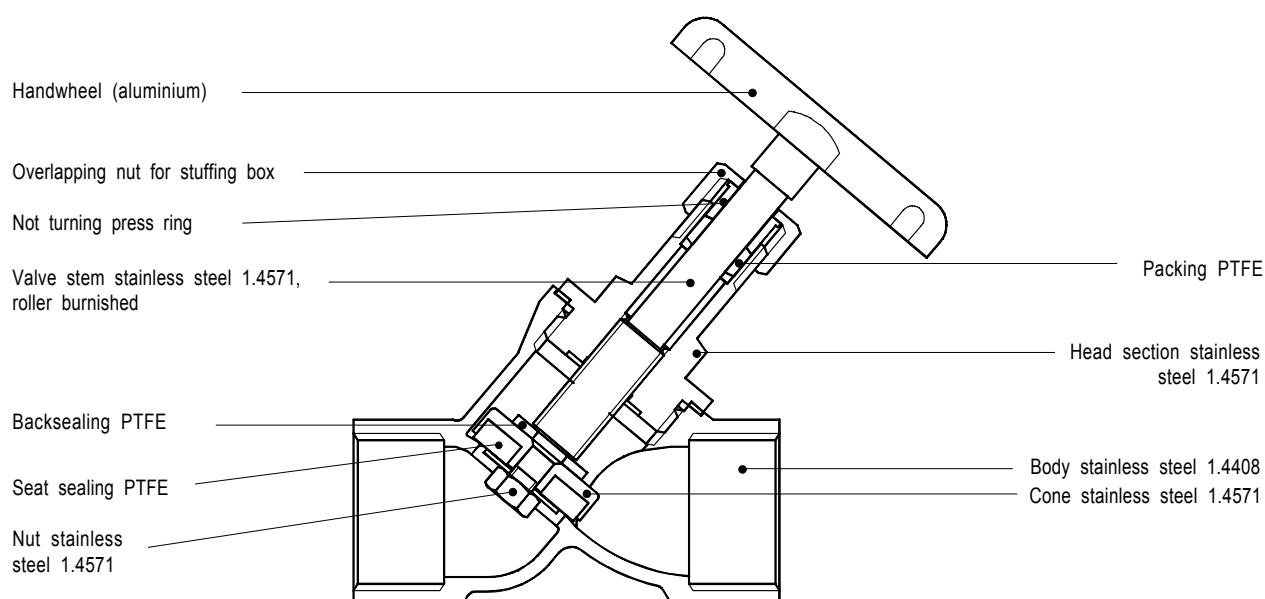

По вопросам продаж и поддержки обращайтесь:

Екатеринбург (343)384-55-89, Казань (843)206-01-48, Краснодар (861)203-40-90,

Москва (495)268-04-70, Санкт-Петербург (812)309-46-40

Единый адрес: ssr@nt-rt.ru

www.ssalzer.nt-rt.ru

SCHUBERT & SALZER
**CONTROL
SYSTEMS**

1 2 3 4 5 6


7	0	1	1	/				V						
---	---	---	---	---	--	--	--	---	--	--	--	--	--	--

1 - 6 : Please quote all 6 sections.

Type Size

—Symbol: "V": Valve
— "A": Actuator (valve without body)
— "R": Repair kit (sealings)

Ordering example:	7011/015V1020 - 5 Nominal size 15mm, angle seat valve, pipe thread acc. DIN 2999, stainless steel body, seat material PTFE, manual operation.
--------------------------	--

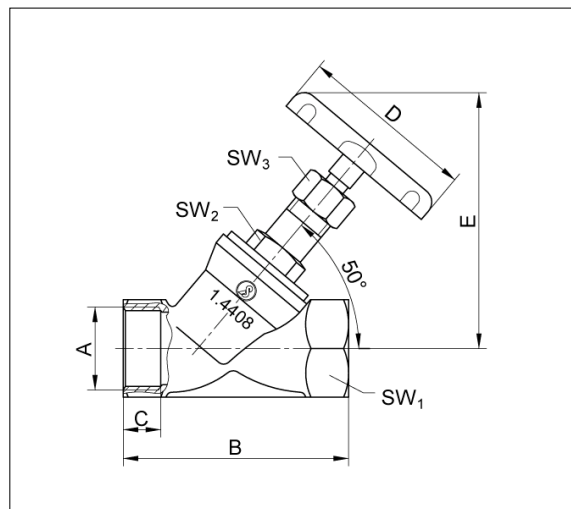

DN	A Rp/NPT	B	C	D	E		SW1	SW2	SW3	Kvs-Value	Weight (kg)
					opened	closed					
15	1/2"	65	12	60	80	73	25	19	20	3,9	0,190
20	3/4"	75	13	70	96	86	31	19	20	9,6	0,270
25	1"	90	15	70	110	96	39	19	20	17	0,460
32	1 1/4"	110	17	80	132	116	48	24	24	28	0,770
40	1 1/2"	120	19	80	141	122	55	24	24	39	1,160
50	2"	150	21	100	169	144	68	27	27	62	1,720

По вопросам продаж и поддержки обращайтесь:
Екатеринбург (343)384-55-89, Казань (843)206-01-48, Краснодар (861)203-40-90,
Москва (495)268-04-70, Санкт-Петербург (812)309-46-40
Единый адрес: ssr@nt-rt.ru
www.ssalzer.nt-rt.ru