

Mini Pinch Valve


7071

DN 2 up to DN 6

SCHUBERT & SALZER
**CONTROL
SYSTEMS**

Valve for special applications in chemistry, analysis and medical technology.

- Fast and simple change of tube
- No fluid contact to the valve
- Pneumatic actuator
- Reverse of function possible

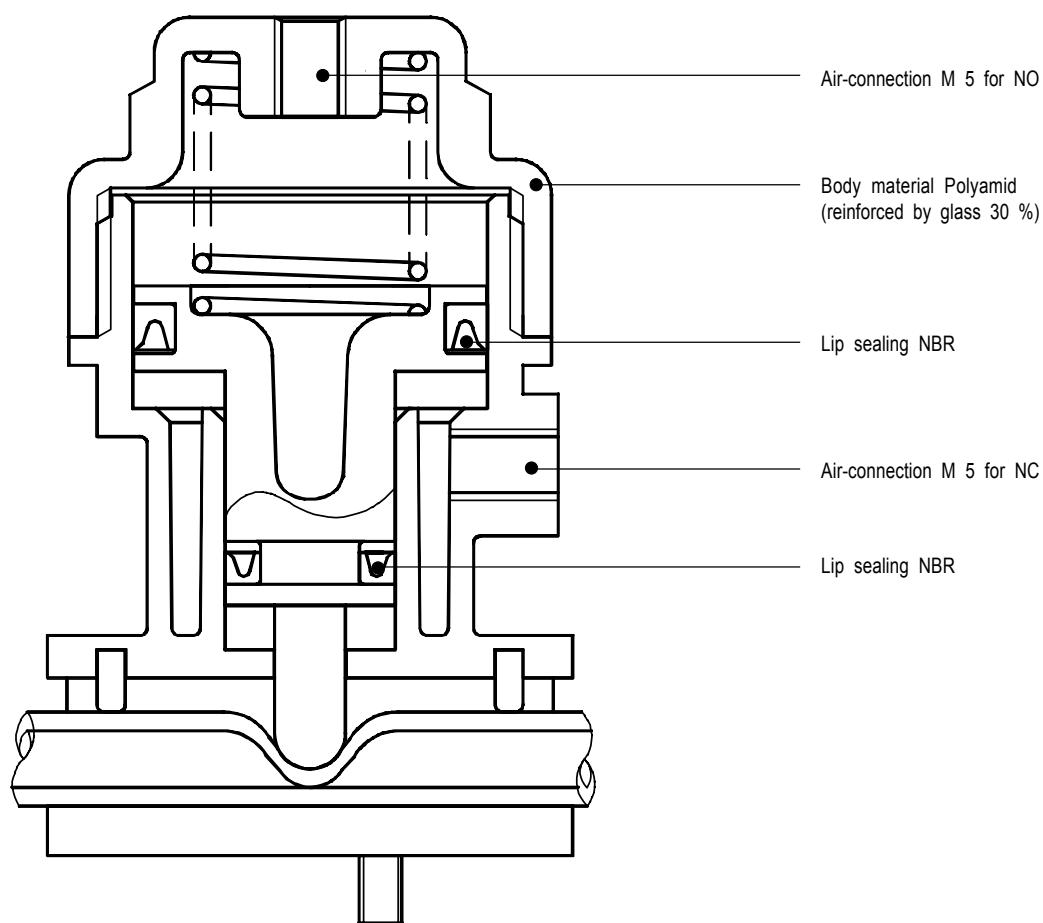

По вопросам продаж и поддержки обращайтесь:

Екатеринбург (343)384-55-89, Казань (843)206-01-48, Краснодар (861)203-40-90, Москва (495)268-04-70,
Санкт-Петербург (812)309-46-40

Единый адрес: ssr@nt-rt.ru


www.ssalzer.nt-rt.ru

Mini Pinch Valve 7071

Technical Information

	Version			Version		
	normally closed			normally open		
Tube orifice size	2	4	6	2	4	6
Tube outside diameter (mm)	4	6	9	4	6	9
Working pressure (bar) Tube quality < 55 Shore	0 - 2	0 - 1,5	0 - 1	0-5 bar according to the quality of the tube 50-70 Shore and the pilot pressure 1-6 bar		
Pilot pressure (bar)	1	1	1	1 - 6	1 - 6	1 - 6
Max. pilot pressure (bar)	6	6	6	6	6	6
Thread of pilot connection	M5	M5	M5	M5	M5	M5
Actuator	pneumatical piston Ø 25 mm			pneumatical piston Ø 25 mm		
Fluid temperature	-30°C up to +100°C			-30°C up to +100°C		
Ambient temperature	-30°C up to +60°C			-30°C up to +60°C		
Switching time (sec.)	0,05	0,05	0,05	0,1	0,1	0,1
for opening	0,05	0,05	0,05	0,1	0,1	0,1
for closing	0,2	0,2	0,2	0,1	0,1	0,1
Viscosity of working medium (according to the orifice size)	12 up to 20°E			12 up to 20°E		
	(90 up to 150 cSt)			(90 up to 150 cSt)		
Weight (g)	65			65		
Ordering Numbers (each valve includes DN 2, DN 4 and DN 6)	4 005 038			4 005 035		

Dimensions

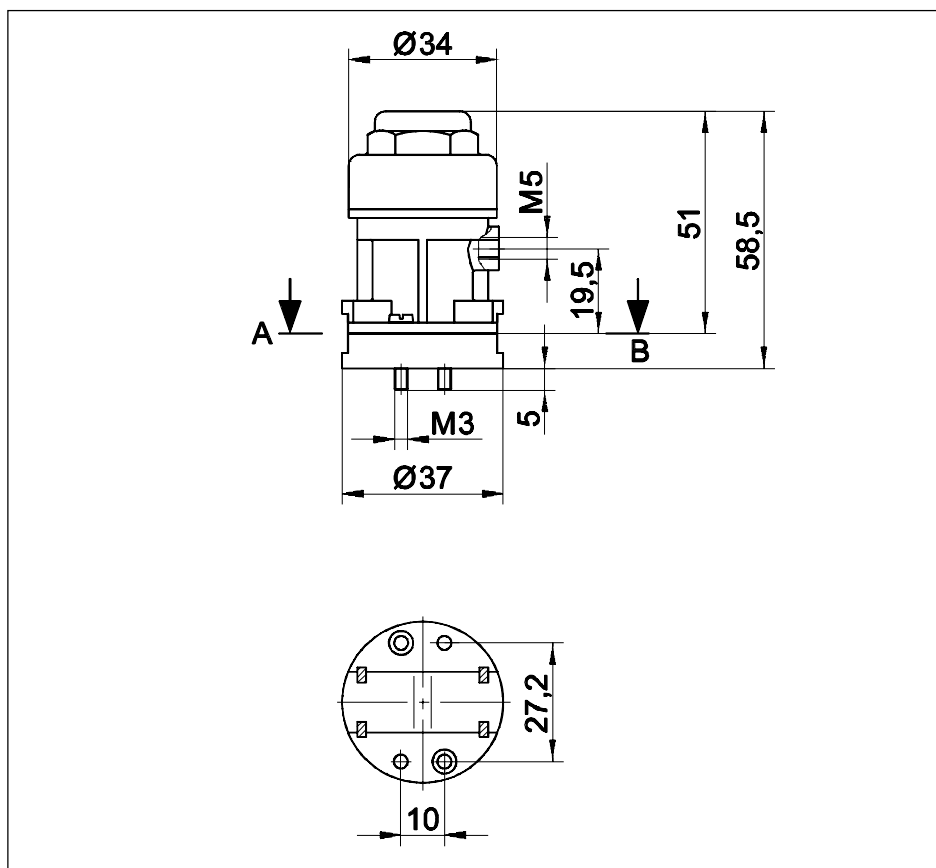

По вопросам продаж и поддержки обращайтесь:
 Екатеринбург (343)384-55-89, Казань (843)206-01-48, Краснодар (861)203-40-90,
 Москва (495)268-04-70, Санкт-Петербург (812)309-46-40
 Единый адрес: ssr@nt-rt.ru
www.ssalzer.nt-rt.ru