



Manual Control Valve 8050/51

GS 1 series DN 15 up to DN 150

SCHUBERT & SALZER
**CONTROL
SYSTEMS**

Manual control valve for neutral through to highly aggressive media.

- Precise control by hand
- Lowest possible weight (especially in larger sizes)
- High Kvs-values
- Low leakage rate
- Simple handling of high pressure differences

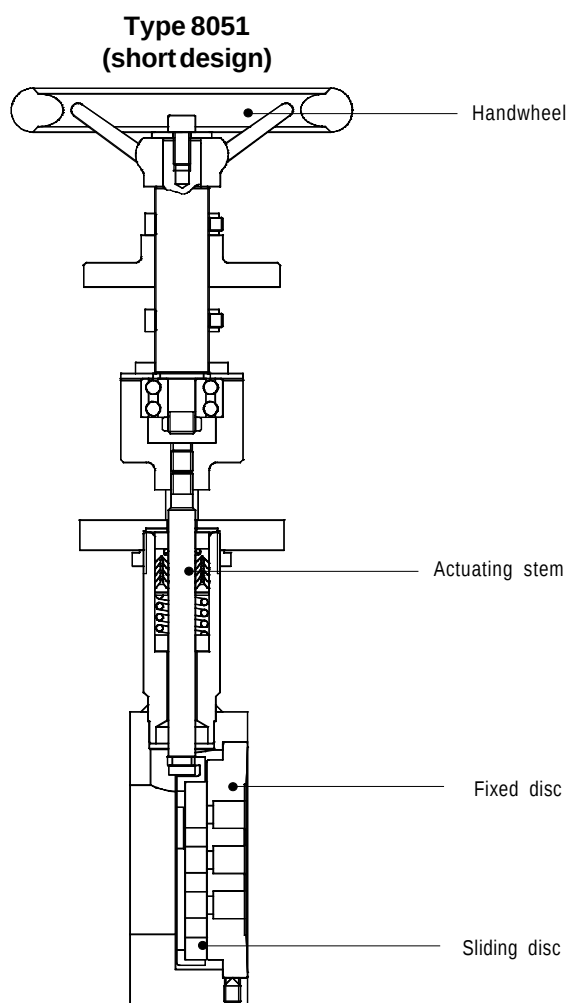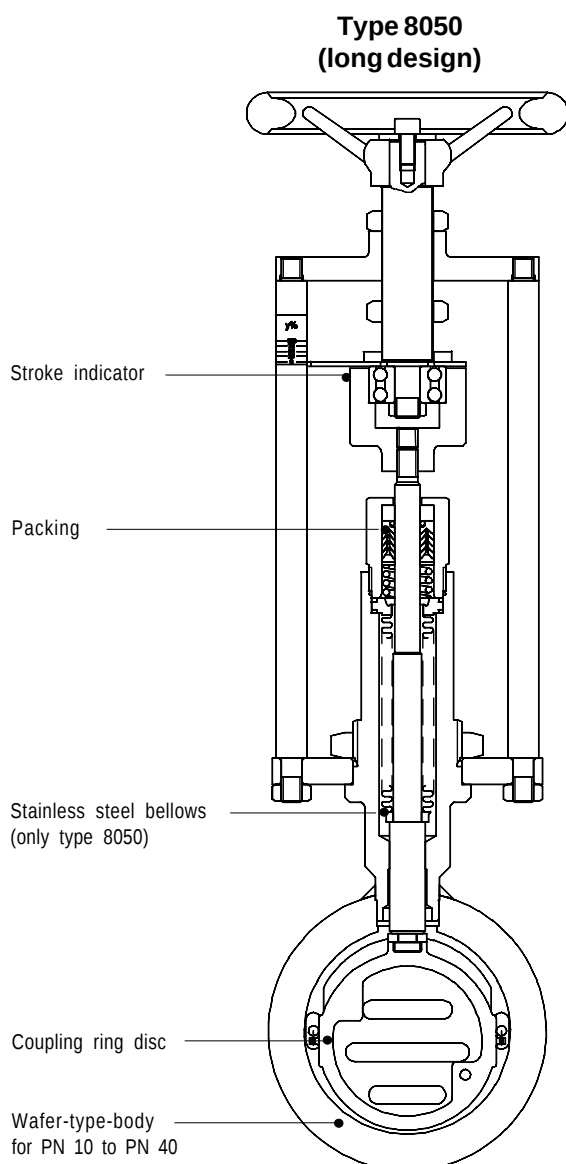

По вопросам продаж и поддержки обращайтесь:
Екатеринбург (343)384-55-89, Казань (843)206-01-48, Краснодар (861)203-40-90,
Москва (495)268-04-70, Санкт-Петербург (812)309-46-40
Единый адрес: ssr@nt-rt.ru
www.ssalzer.nt-rt.ru

Manual Control Valve 8050/51-GS1

Technical Information

Body design	Flangeless, wafer-type construction dimensions to DIN EN 558-1 series 20	
Nominal sizes	DN 15 up to DN 150 Type 8050 DN 15 up to DN 125 Type 8051	
Nominal pressure	PN 40 acc. DIN 2401 also for flanges PN 10 up to PN 25	
Media temperature	Body 1.0570 -10°C up to +300°C Body 1.4571 -60°C up to +350°C Body (short) up to +230°C	
Leakage (% of Kvs)	Disc pair Carbon-stainless steel < 0,0001	Disc pair STN 2 < 0,001

Admissible Differential Pressure (For temperatures of up to 120°C)

DN	carbon-stainless steel	STN2
	max. differential pressures	
	bar	bar
15	40	40
20	40	40
25	40	40
32	40	40
40	40	27
50	40	40
65	40	38
80	40	22
100	25	13
125	16	9
150	16	11

**For temperatures of 120°C and above:
obey application limits !**

Applications limits for GS1-Valves made of stainless steel PN 40

DN	Sliding unit: carbon - stainless steel, coated max. admissible diff. pressures for GS1-valves						Sliding unit: carbon - STN2 max. admissible diff. pressures for GS1-valves					
	100°C	150°C	200°C	250°C	300°C	350°C	100°C	150°C	200°C	250°C	300°C	350°C
15 - 25	40	38	34	33	31	29	40	38	34	33	31	29
32	40	38	34	33	31	29	40	38	34	31	25	22
40	40	38	34	33	31	29	27	25	24	19	16	14
50	40	38	34	33	31	29	40	38	34	33	28	24
65	40	38	34	33	31	29	37	35	33	27	22	19
80	40	38	34	31	26	23	22	21	20	16	13	11
100	24	23	22	19	16	14	13	12	12	10	8,0	7,0
125	16	15	14	12	10	9,0	8,8	8,4	8,0	6,5	5,3	4,6
150	16	15	14	13	12	12	11	10	9,8	7,9	6,5	5,6

Limitation for valves in carbon steel: 300°C

SCHUBERT & SALZER
**CONTROL
SYSTEMS**

Body	Carbon steel 1.0570 /1.0619	Stainless steel 1.4571 /1.4581
Packing	PTFE (Carbon filled), spring 1.4310	
Actuating stem	Stainless steel 1.4571, roller burnished	
Bellows	Stainless steel 1.4571	
Fixed disc	Stainless steel 1.4581, coated	STN2-disc
Sliding disc	Special carbon material	STN2-disc
Coupling ring for disc	Stainless steel 1.4581	
Handwheel	Aluminium	

[illegible]

6 - 16: Quote only if required.


1. Type		2. Connection		3. Body material		4.		5. Actuator		6. Special versions	
A	GS manual valve type 8051 (short design)	0	Flangeless design acc. DIN 2632-2635 (PN10-PN40)	0	Carbon steel 1.0570 /1.0619	-	without significance	5	manually operated	M	Special versions
B	GS manual valve type 8050 (long design)			1	stainless steel 1.4571/1.4581						

7.		8 Stem sealing		9. Moving disc		10. Fixed plate		11. Kvs-values		12 Characte-ristic .		
-	w without significance	-	PTFE-packing self adjusting	-	Carbon material	-	Stainless steel 1.4571, coated	-	100% (Stand.)	-	linear	
		1	additional bellows 1.4571	9	STN2-disc	1	STN2-plate	A	red. to 63%	1	equal percentage	
				B	Carbon, fibre fibre reinforced			1	red. to 40%	B		
								2	red. to 25%	C		
								2	red. to 16%			
								3	red. to 10%			
								3	red. to 6,3%			
								4	red. to 2,5%			
								5	red. to 1%			
								6	red. to 20%			
								7	red. to 12%			
								8	red. to 2%			
								9	red. to 0.4%			


GS manual control valve (long design), DN 125, PN 10/40, C-steel 1.0570, Actuator manual operating, additional stainless steel bellows 1.4571

Manual Control Valve 8050/51-GS1

Dimensions and Weights

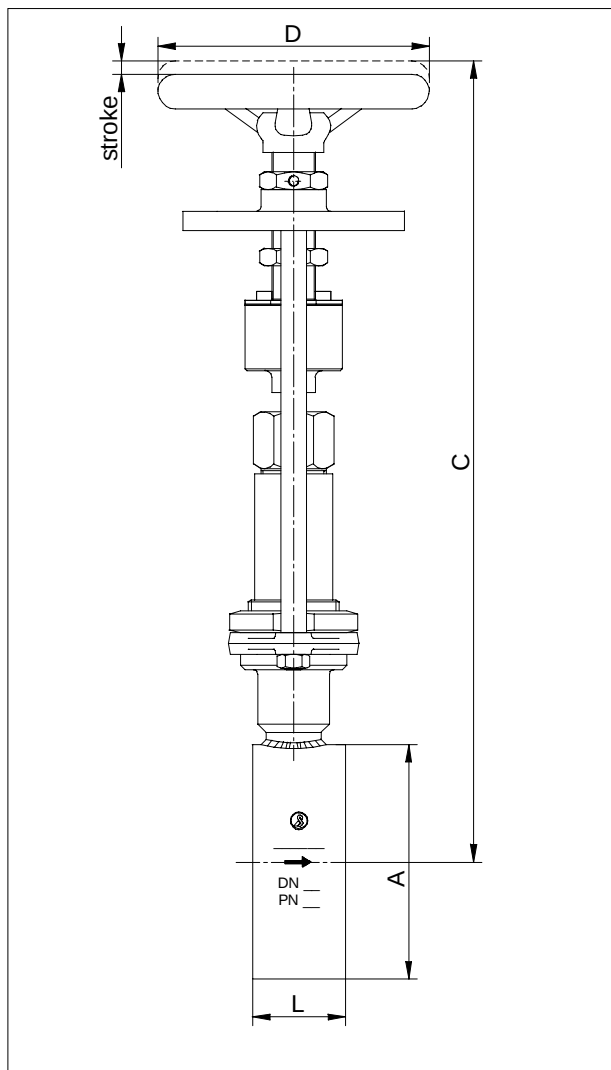

Type 8050

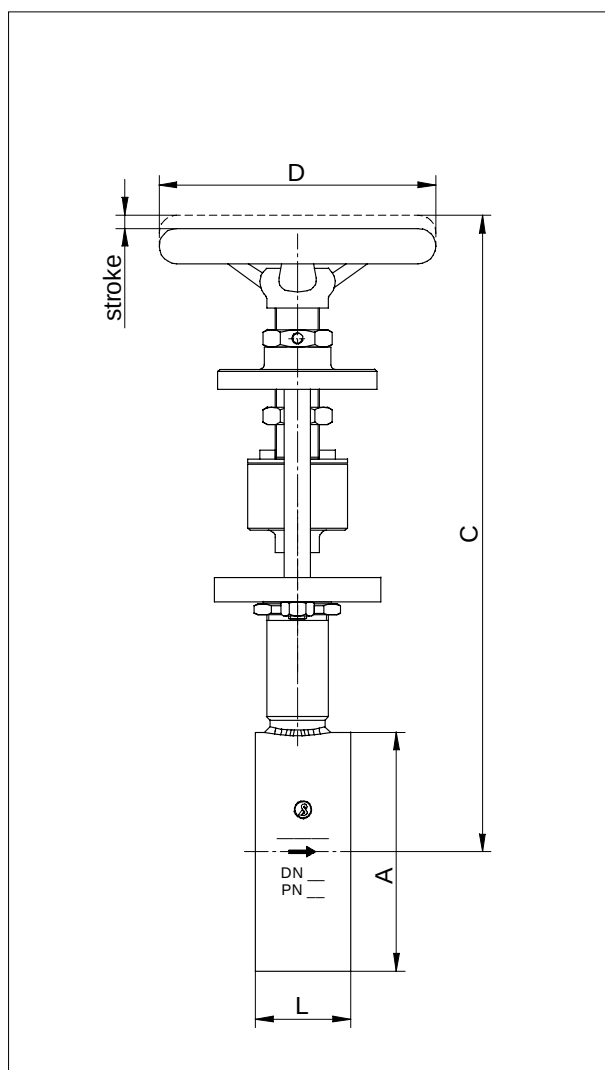

Type 8051

DN	A	C max 8050	C max 8051	D	L	Weight in kg		Stroke
						8050	8051	
15	53	332	240	125	33	3,5	2,8	6
20	62	337	245	125	33	3,6	2,9	6
25	72	342	250	125	33	3,7	3	6
32	82	344	255	125	33	3,8	3,1	6
40	92	347	260	125	33	3,9	3,2	6
50	108	362	285	125	43	5	4,3	8
65	127	372	295	125	46	5,5	4,8	8
80	142	377	300	125	46	6,2	5,5	8
100	164	392	315	125	52	7,4	6,7	8,5
125	194	407	330	125	56	9,4	8,7	8,5
150	219	422	-	125	56	11,2	-	8,5

Dimensions in mm

По вопросам продаж и поддержки обращайтесь:
Екатеринбург (343)384-55-89, Казань (843)206-01-48, Краснодар (861)203-40-90,
Москва (495)268-04-70, Санкт-Петербург (812)309-46-40
Единый адрес: ssr@nt-rt.ru
www.ssalzer.nt-rt.ru